



DataMate™

Heat Removal/Environmental Control

ECONOMICAL, SPACE-SAVING COOLING SYSTEMS FOR SENSITIVE ELECTRONICS



DataMate maintains temperature and humidity to the specifications of sensitive electronics such as CAD/CAM, Telecommunications Equipment, Data Processing, Electronic Controls, Desktop Publishing, MRI and CAT Scan, LAN/WAN, Laboratories, And Other Critical Electronic Systems



COMPUTER-MATCHED PRECISION COOLING DESIGNED TO FIT THE SMALLEST SPACES

DataMate precision environmental systems are the perfect solution for cramped quarters requiring temperature and humidity control for sensitive electronics. And while the systems are matched to meet the needs of computers, they are also designed to be convenient for the people sharing space with the protected equipment.

Space-saving. The slim, compact DataMate may be wall- or floor-mounted, and requires minimal service access, limiting floor space requirements.

High sensible cooling capacity. Unlike “comfort” air conditioners, Liebert systems are designed for the cooling requirements of electronic equipment—80% of the capacity dedicated to the removal of dry “sensible” heat, and 20% for control of humidity.

Reliable. The Liebert installed-base is a testimonial to system reliability. Components include a compressor; a high efficiency copper-tube, aluminum-fin evaporator coil; and a double inlet, direct drive fan.


Quiet. The units are designed to operate quietly with the compressor vibration-isolated from the chassis. The cabinet is also insulated to further ensure quiet operation. On many models, the compressor-containing condensing unit can be remotely located to further reduce noise levels in the controlled space. Quiet-Line outdoor condensing units are available for 6-8 dba sound level reduction over the standard models.

Flexibility options. DataMate systems are available in capacities of 1.5, 2 and 3 tons in air, water, glycol, and a self-contained 3 ton chilled water model. Systems may be configured as self-contained or separated from the condensing unit, depending on the model.


Easy installation. All DataMate components are precharged, and require no field brazing, evacuation or charging. Precharged refrigerant lines are available to connect evaporator and remote condensing unit modules when required.

Two-speed fan operation. High speed provides quiet operation and maximum cooling. Low speed provides maximum dehumidification and lowest sound level. The speed can be automatically or manually selected.


Corrosion-Resistant Frame and Cabinet. Durability is ensured with Autophoretic frame coating, and Powder Coated Paint panels.

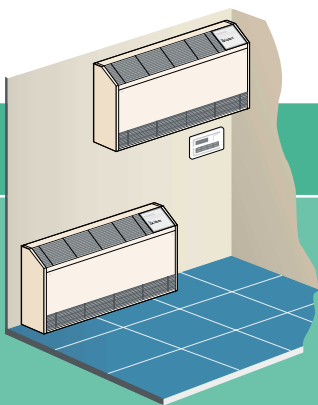

The compact DataMate system requires minimal floorspace; when wall-mounted, no floorspace is required.

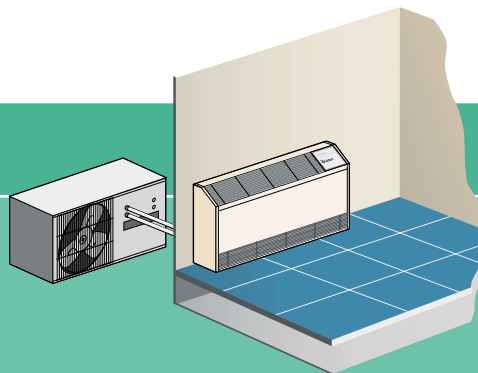

Outdoor Air Cooled. Suitable for roof or ground level site. The condensing unit is designed for operation as low as -30 °F.

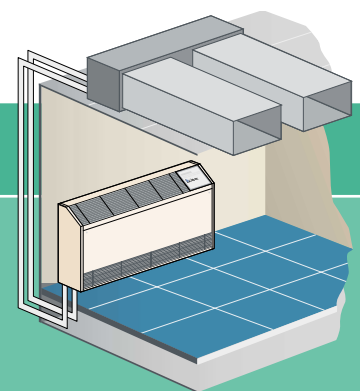

Indoor Air Cooled. For high-rise and other applications where roof or ground level locations are impractical. May be located above the dropped ceiling and ducted to the outside. Designed for operation down to -20 °F ambient.



Indoor and outdoor condensing unit options maximize DataMate installation options for better system flexibility. Outdoor models are available in Quiet-Line and High Ambient versions.

Specifications


	60 Hertz				50 Hertz			
	High Fan Speed		Low Fan Speed		High Fan Speed		Low Fan Speed	
	BTUH	kW	BTUH	kW	BTUH	kW	BTUH	kW
Air Cooled								
DME020E								
Total	16900	(5.0)	16800	(4.9)	17600	(5.2)	17300	(5.1)
Sensible	15400	(4.5)	14300	(4.2)	14300	(4.2)	13400	(3.9)
DME027E								
Total	21900	(6.4)	21600	(6.3)	19900	(5.8)	19600	(5.7)
Sensible	20200	(5.9)	18700	(5.5)	17700	(5.2)	16400	(4.8)
DME037E								
Total	32100	(9.4)	31800	(9.3)	28900	(8.5)	28600	(8.4)
Sensible	26400	(7.7)	25100	(7.4)	23000	(6.7)	22000	(6.4)
Water Cooled								
DME020E								
Total	18000	(5.3)	17800	(5.2)	15300	(4.5)	15100	(4.4)
Sensible	15900	(4.7)	14800	(4.3)	13400	(3.9)	12400	(3.6)
DME027E								
Total	23800	(7.0)	23400	(6.9)	20200	(5.9)	19800	(5.8)
Sensible	21000	(6.2)	19400	(5.7)	17800	(5.2)	16500	(4.8)
DME037E								
Total	33300	(9.8)	32900	(9.6)	28400	(8.3)	28000	(8.2)
Sensible	26900	(7.9)	25600	(7.5)	22800	(6.7)	21700	(6.4)
Glycol Cooled								
DME020E								
Total	15700	(4.6)	15600	(4.6)	13400	(3.9)	12900	(3.8)
Sensible	15700	(4.6)	13800	(4.0)	12000	(3.5)	10300	(3.0)
DME027E								
Total	22100	(6.5)	20300	(5.9)	18600	(5.4)	16700	(4.9)
Sensible	22100	(6.5)	18200	(5.3)	18600	(5.4)	14400	(4.2)
DME037E								
Total	29600	(8.7)	29500	(8.6)	26000	(7.6)	26000	(7.6)
Sensible	25400	(7.4)	24100	(7.1)	22400	(6.6)	21800	(6.4)
Chilled Water								
DME044C								
Total	27000	(7.9)	24800	(7.3)	24400	(7.1)	22500	(6.6)
Sensible	24900	(7.3)	22700	(6.7)	22000	(6.4)	20100	(5.9)

Net capacity data BTU/HR (kW) at 72 F DB, 50%RH




Microprocessor control system. The microprocessor control system, with its user-friendly wall-mount display, provides precise temperature and accurate alarm setpoints. Using touch-sensitive buttons, the monitor/control panel allows you to select and display time, temperature, humidity, alarm indication and other parameters.


NRTL-C Certified. Standard products are NRTL-C listed/certified. NRTL-C meets both U.S. and Canadian government safety standards, providing fast, hassle-free inspection and building code approval.

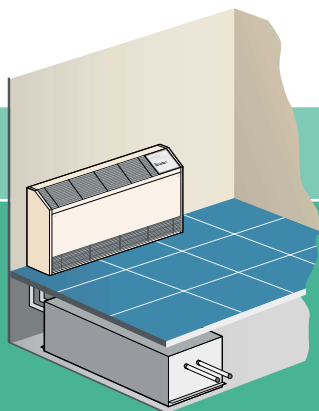

Water/Glycol Cooled Remote. Utilizes an existing water or glycol loop. Condensing unit is located under the raised floor or above the dropped ceiling.

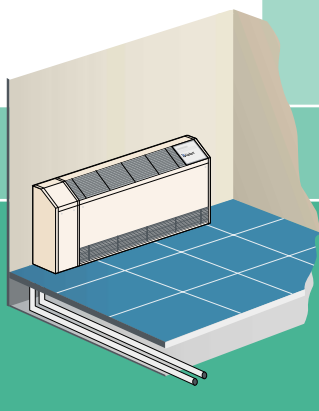

Water/Glycol Cooled Integral. Totally packaged. A single power and water supply connection puts the unit in operation.

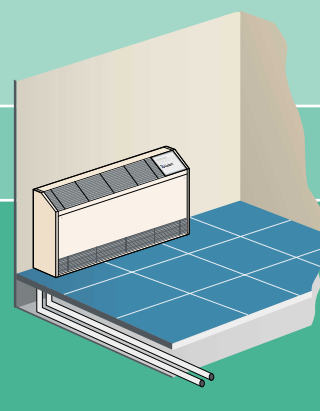

Chilled Water. This unit simply connects to a chilled water loop, for quick and easy installation.

TOTAL CONFIDENCE IN THE DECISION YOU'VE MADE.



DataMate™

Heat Removal/Environmental Control

No organization in the world today has a better understanding of exactly what it takes to keep critical information and industrial processes operating continuously than Liebert.

We are the only company in this business that maintains a strong local presence of Representatives, Distributors and Resellers. This resource, coupled with our broad product line, gives Liebert the ability to create a "tailored solution" that will meet your protection needs precisely and efficiently.

There are Liebert systems designed for nearly every application — from basic protection for network PCs, servers or point-of-sale terminals...to highly engineered systems for computer rooms, telecommunications centers, Internet hosting sites, colocation facilities and industrial control rooms. But no matter what the size or complexity, the availability of these critical electronic systems is Liebert's primary focus.

With your purchase of a Liebert product, you are buying into a company that stands behind its products. You are also aligning yourself with an organization that has a reputation for quality and reliability that is second to none.

After the sale, Liebert provides comprehensive support wherever and whenever it's needed, with the largest service organization in the industry.

In the systems protection business it's when you need someone to count on that you find out whether you've made the right choice. Liebert customers — many of them with us for over three decades — already know how good their decision was.

A simple solution depends on a simple problem to be successful. Unfortunately, assuring the continuous operation of a critical facility is anything but. Liebert gives you all the options you need to make the smart decision on protection...the right decision.



That Is
The Liebert Experience

LIEBERT CORPORATION

1050 DEARBORN DRIVE
P.O. Box 29186
COLUMBUS, OHIO 43229
800.877.9222 PHONE (U.S. &
CANADA ONLY)
614.888.0246 PHONE (OUTSIDE U.S.)
614.841.6022 FAX

VIA LEONARDO DA VINCI 8
ZONA INDUSTRIALE TOGNANA
35028 PIOVE DI SACCO (PD)
ITALY
39 049 9719 111 PHONE
39 049 5841 257 FAX

23/F ALLIED KAJIMA BLDG.
138 GLOUCESTER ROAD
WANCHAI
HONG KONG
852 2 572 2201 PHONE
852 2 831 0114 FAX

LIEBERT WEB SITE

<http://www.liebert.com>

24 x 7 TECH SUPPORT

800 222 5877 PHONE
614 841 6755 (OUTSIDE U.S.)

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2003 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice. All names referred to are trademarks or registered trademarks of their respective owners.

© Liebert and the Liebert logo are registered trademarks of the Liebert Corporation.

© Keeping Business in Business is a registered trademark of the Liebert Corporation.

The Emerson logo is a trademark and service mark of Emerson Electric Co.

SL-11000 (R2/03)
Printed in USA

